


Shifter Installation Guide



ASETEK
SIM SPORTS®

Tools needed:


2,5 mm Allen key (included) 

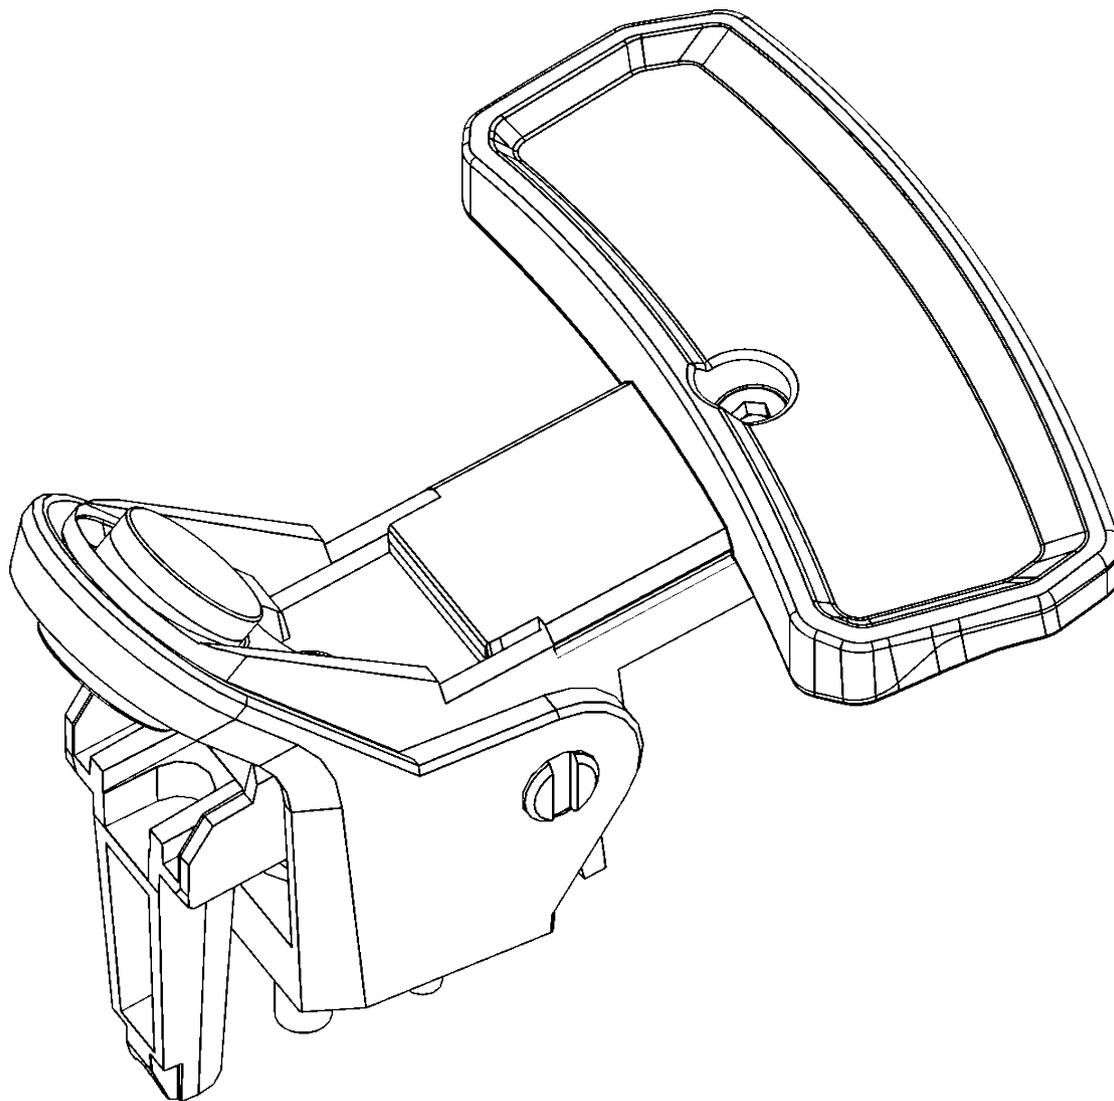

Notice: The shifter and wheel used in these illustrations are just examples and yours may vary.

Step 1:


Loosen the small screw on the front of the paddle. Make sure to only loosen it and not unscrew it completely.

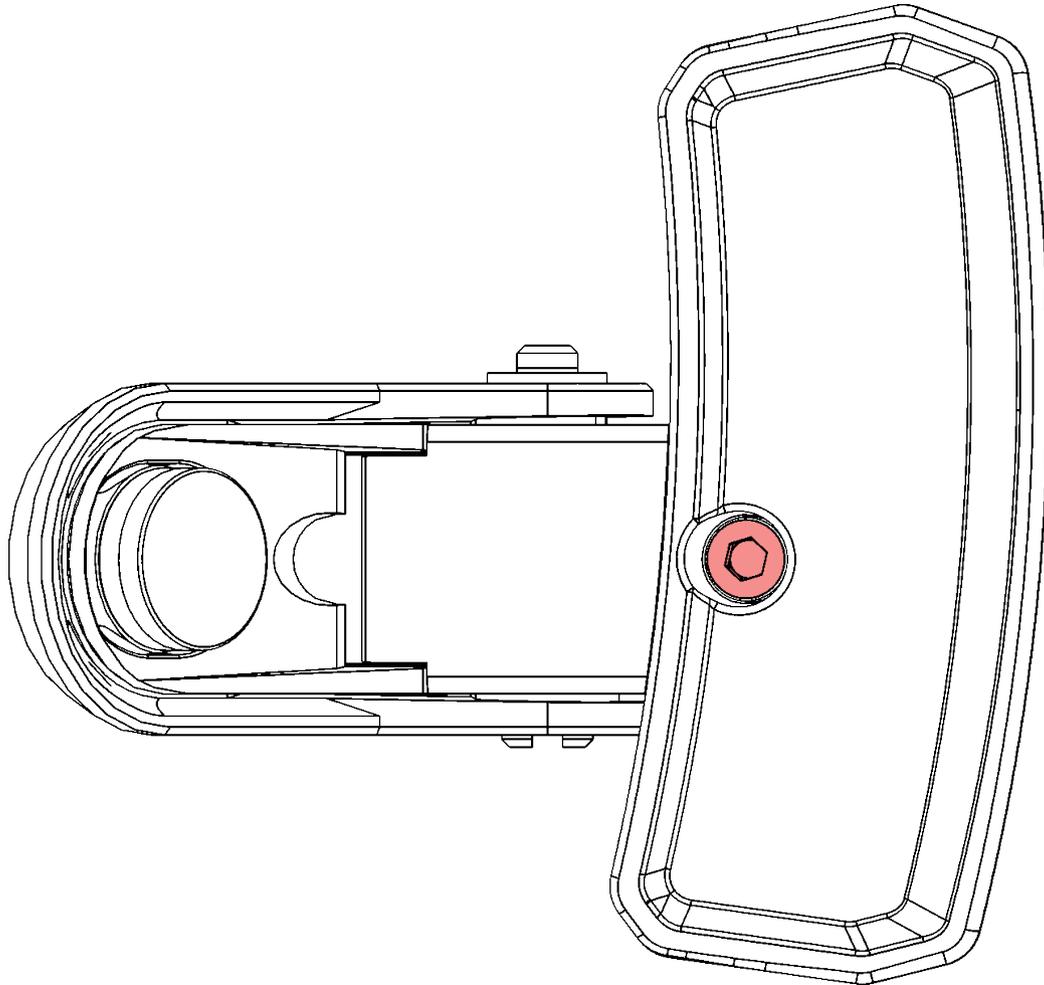

Notice: Be careful of the magnet when loosening the screw. See step 4.

Step 2:


Pull the paddle to the side to expose a hole with a screw on the bottom

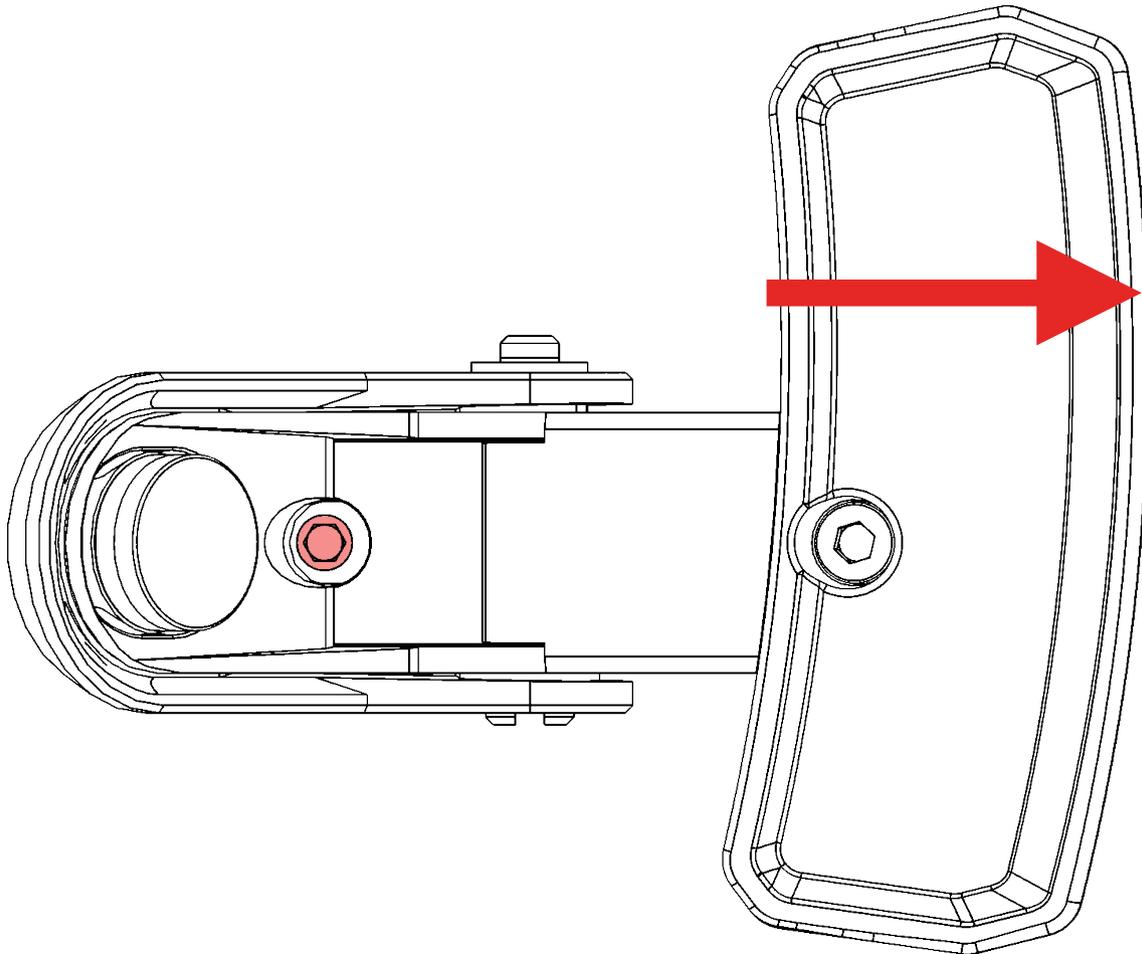

Step 3:


Place your button box facing down - for example in the box it came in.

Notice: Be careful when moving the button box, as to not damage the 2-way toggle switches.

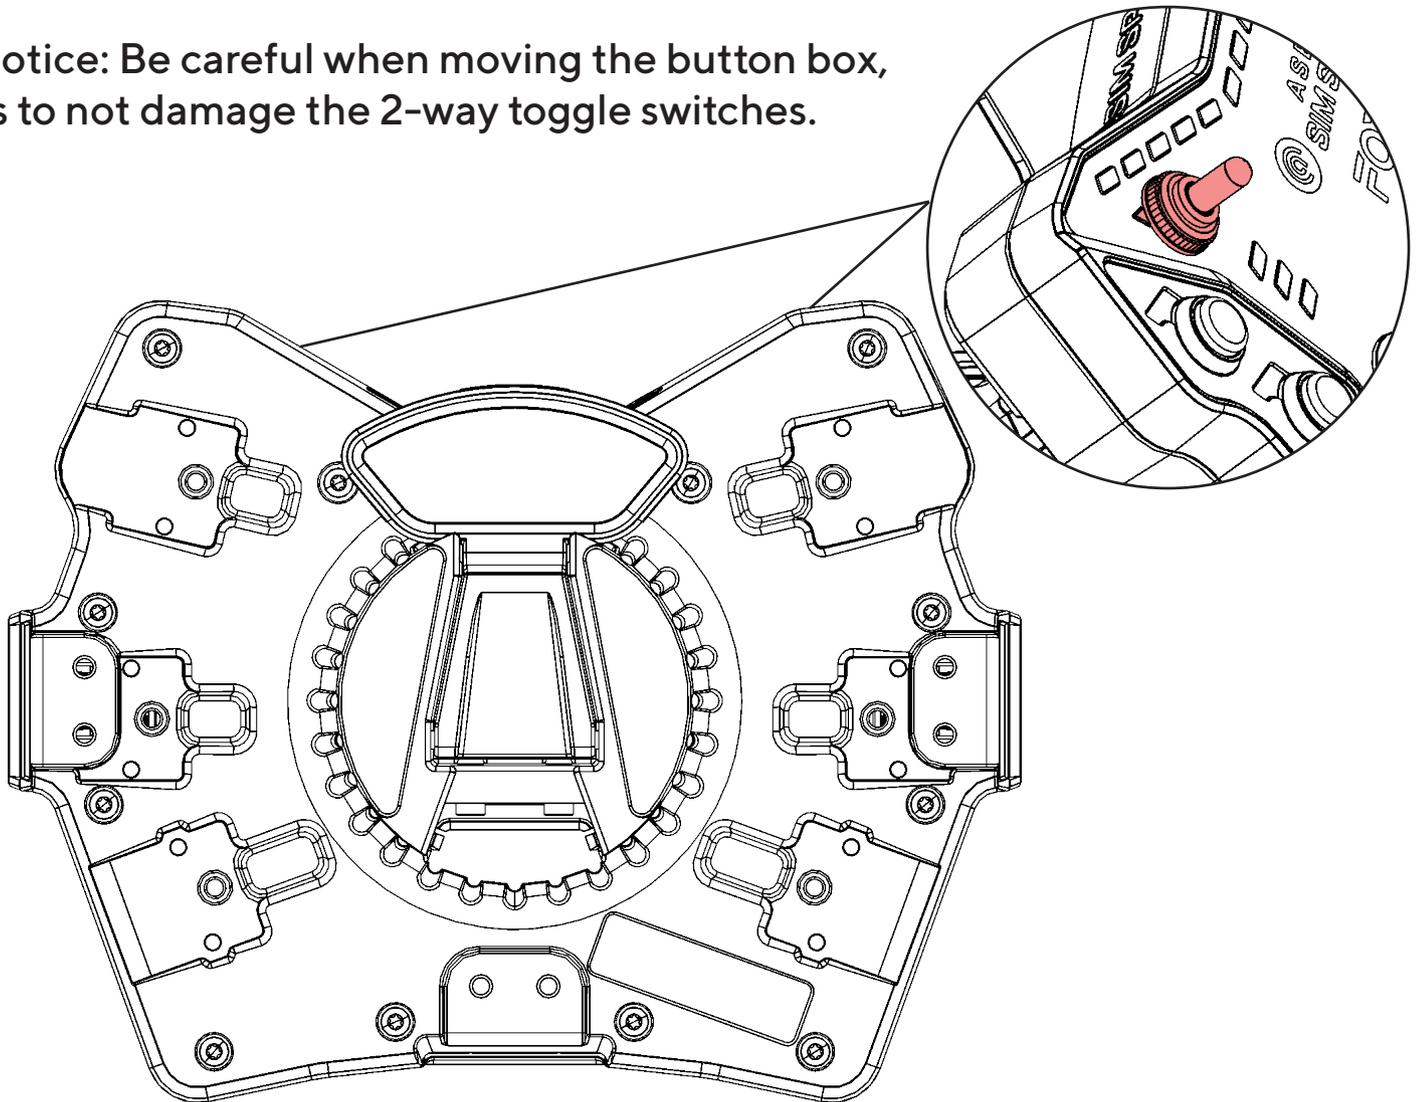


Step 4:

Locate the slots designated for the shifter and fit it in place.

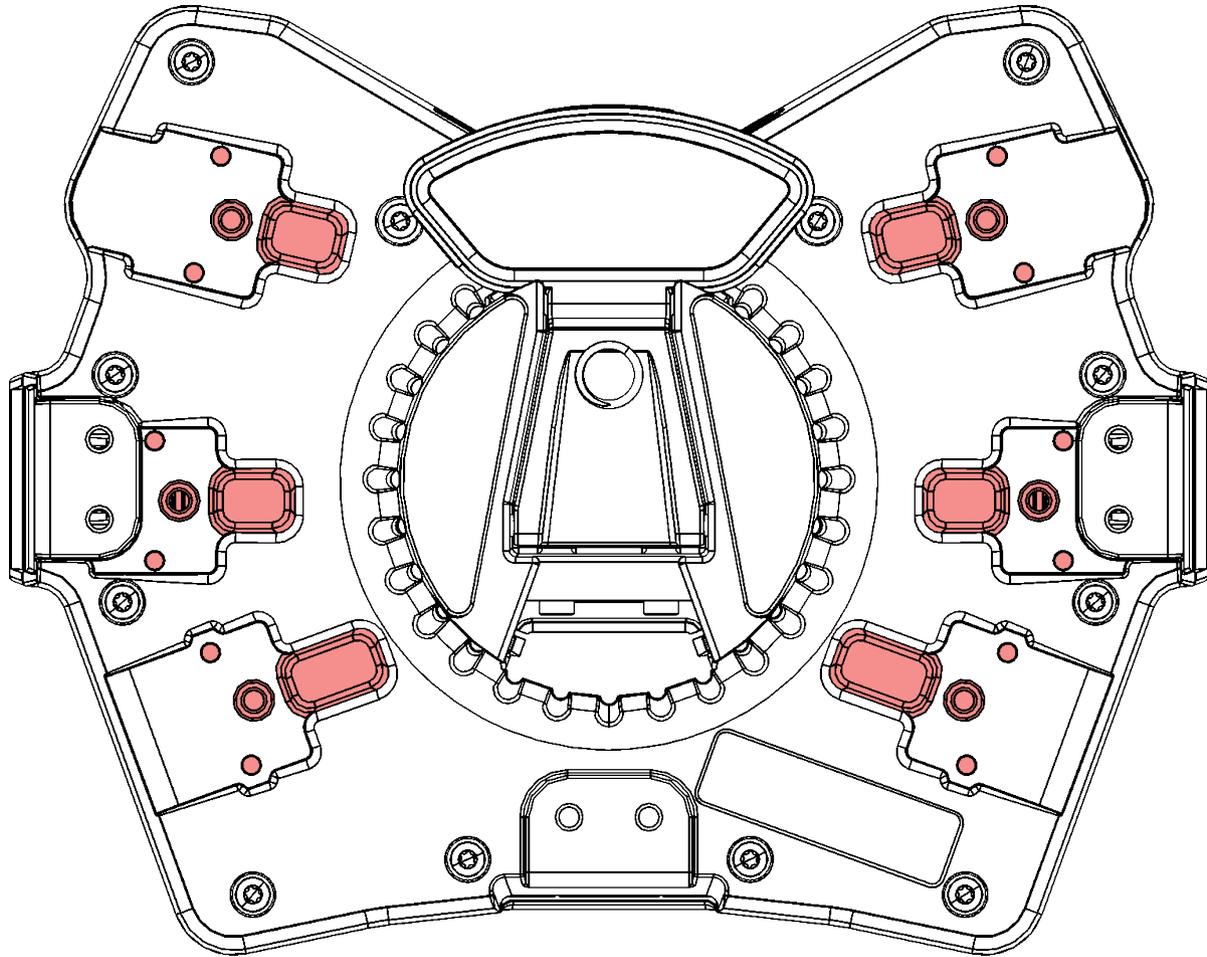


Step 5:

Make sure to cover the magnet with your finger before installing to prevent scratching the magnet with the Allen key.

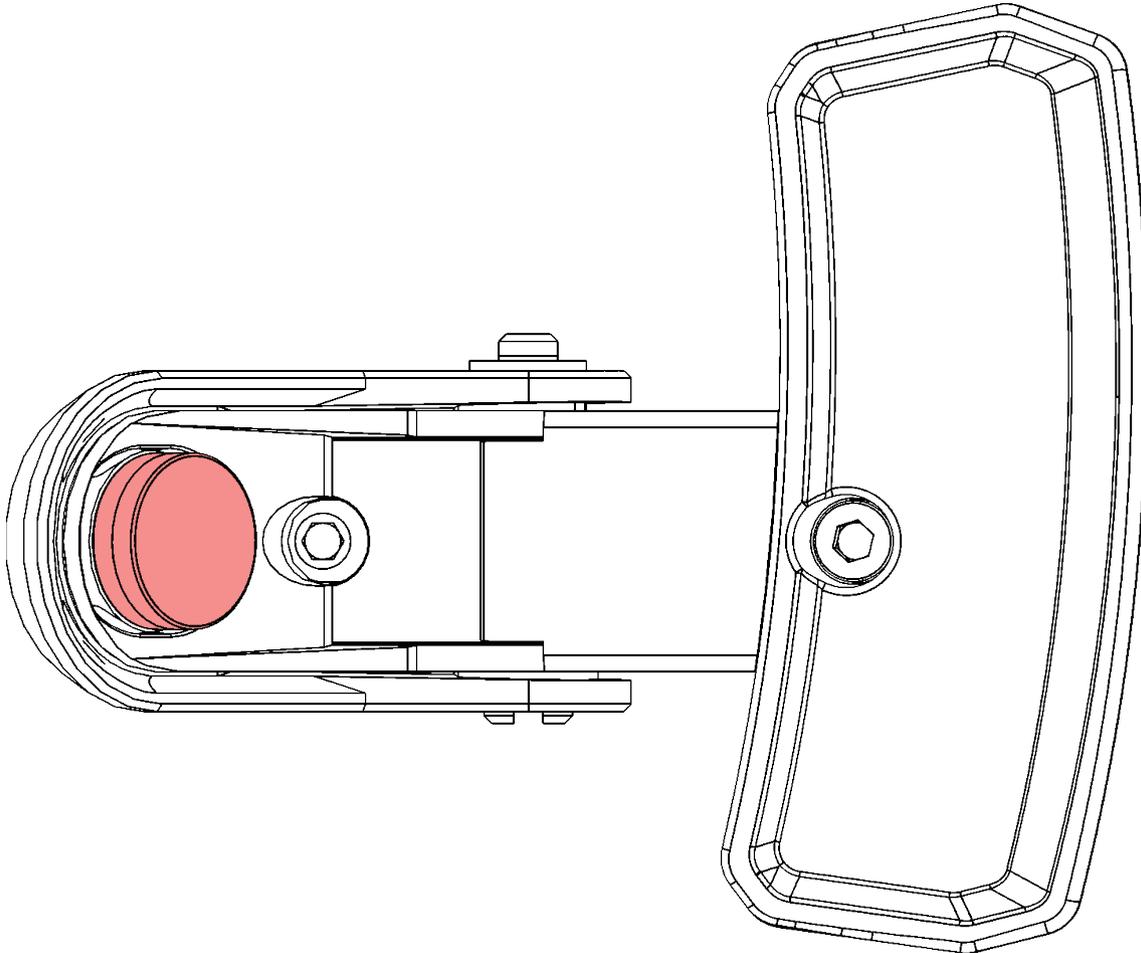

Step 6:

Tighten the screws to secure the shifter in place.

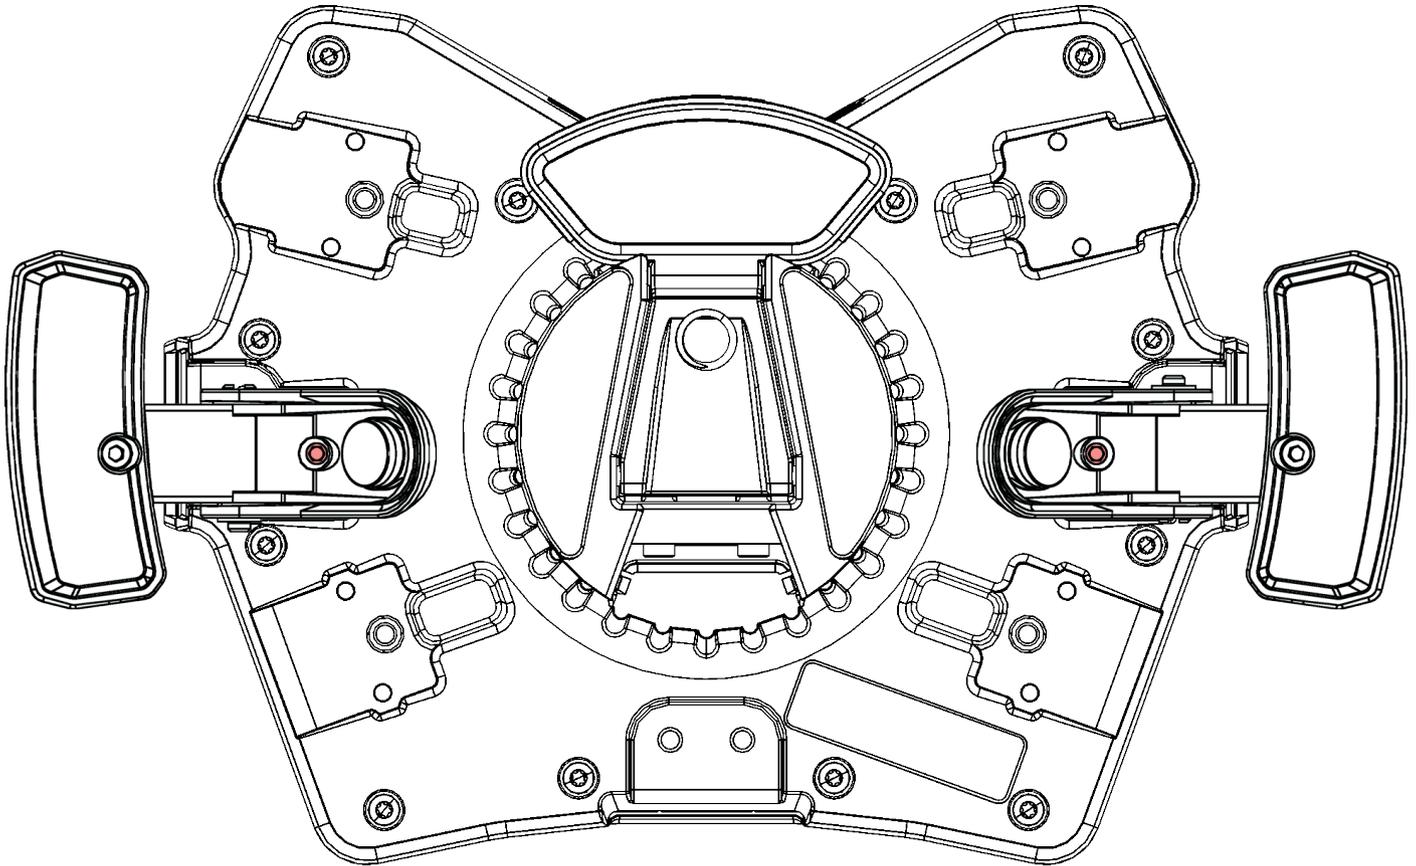

Notice: You can adjust the width of the paddle before tightening the screw on the front of the paddle.

Follow the same procedure for clutch paddles and magnetic input paddles.